




Certified End Mill Holders Quality & Performance Guaranteed



SAVE 30%


Scan QR Code to view all end mill holders included in this promotion!

CAT40 End Mill Holders Features:

- H5 bore tolerance for improved concentricity and tool life
- Taper ground to AT3 specification for maximum spindle contact
- Balanced to 15,000 RPM at G6.3

COOLANT OPTIONS

- CoolBLAST coolant channels direct coolant on tool path.
- CoolFLEX holders feature coolant-thru tool or DIN B coolant.
- CoolBLAST and CoolFLEX coolant options

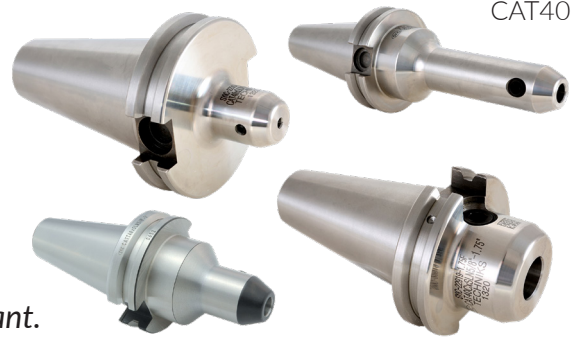

CAT40

Inch / Metric | Stubby Length | Extended Length |
Rigid Reach | CoolBlast | Rigid Reach w/CoolBlast
| CoolBlast with CoolFlex | CoolFlex

CAT50 End Mill Holders Features:

- H5 bore tolerance for improved concentricity and tool life
- Taper ground to AT3 specification for maximum spindle contact
- Balanced to 15,000 RPM at G6.3

COOLANT OPTIONS

- Coolant channels in the bore direct coolant precisely to the cutting edge
- Effective removal of chips for faster feed rates
- Through spindle and DIN-B coolant enabled



CAT50

Inch / Metric | Stubby Length | Extended Length |
Rigid Reach | CoolBlast | Rigid Reach w/CoolBlast
| CoolBlast with CoolFlex | CoolFlex

BT30 / BT40 / BT50 End Mill Holders Features:

- H5 bore tolerance for improved concentricity and tool life
- Taper ground to AT3 specification for maximum spindle contact
- Balanced to 15,000 RPM at G6.3

Inch / Metric | Extended Length |
Rigid Reach | CoolFlex | DualDrive



BT30

BT50



BT40



Offer Good Through 12/31/22

NEW BRIGHTON: 800-862-6093 • 952-884-9388
DULUTH: 800-662-5789 • 218-628-0303
WINONA: 800-862-6093 • 507-459-4210

MarsSupply.com • customerservice@marssupply.com